

Slide Set GS 2G2 - PL HCP

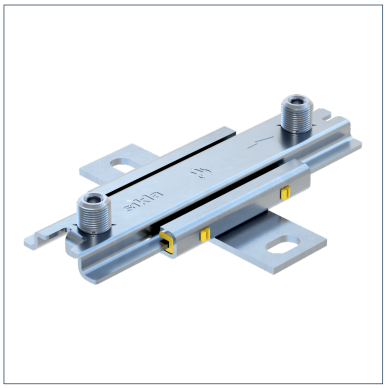

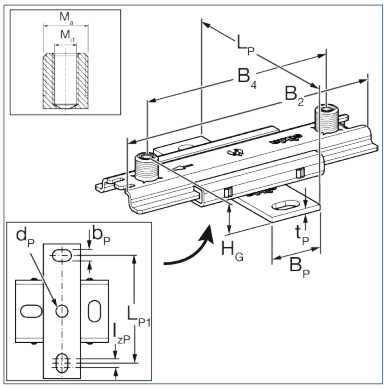

General Information

Slide Set for single and double mounting of mechanical equipment, to be used on Sikla Channels, brick or concrete walls and on bearers. To be used preferably in combination with Sikla Pipe Clamps Ratio S and Stabil D-3G. Various connection options with these pipe clamps ranging between M10 and R1'. For adapters for these connection options (see Adapter AD f/f). Sound absorption by means glass fibre reinforced PA slide rails.

Installation

Lever arm L(max): 150 mm
Max. sliding distance: 140 mm

Temperature

Permissible long-term temperature	130 °C

Mechanical Properties

Static friction µ0	0,18

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Sliding element material	PA GF
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{Z,perm.}	V{Z,perm.}
GS 2G2 - PL HCP	0,60 kN	1,20 kN

Note on loadings

The load capacity of the connecting parts used is to be considered. This applies particularly under stress of fire.

Fire resistance

Type	Fire Resistance 30 min	Fire Resistance 60 min	Fire Resistance 90 min	Fire Resistance 120 min
GS 2G2 - PL HCP	0,6 kN	0,43 kN	0,28 kN	0,2 kN

Slide Set GS 2G2 - PL HCP

Types

Type	Max. lever arm	Max. slide path	Thread connection	Weight	Quantity	Part number
GS 2G2 - PL HCP	150,00 mm	140,00 mm	M10/M16	0,661 kg/ pcs.	25 pcs.	114594

Dimensions

Type	b	B2	B4	BP	dP	HG	lz	LP	LP1	Ma	Mi1	tP
GS 2G2 - PL HCP	13 mm	200 mm	150 mm	40 mm	13 mm	39 mm	10 mm	145 mm	116 mm	M16	M10	4 mm

Certification