


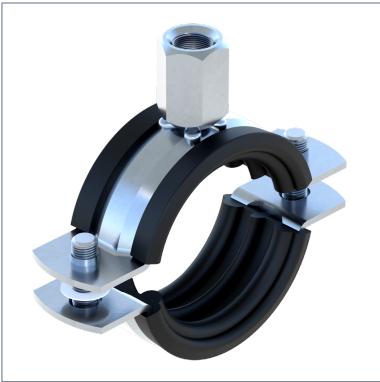

General Information

Two-piece pipe clamp with double thread connection (M8/M10) and sound absorption lining for the installation of pipelines. Applicable for sound-absorbed installations according to DIN 4109 specifications.

Installation

Tightening torque: 2 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Isolating element material	SBR/EPDM
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
SRS 2G ME 12- 15	0,46 kN
SRS 2G ME 15- 19	0,46 kN
SRS 2G ME 20- 23	0,46 kN
SRS 2G ME 25- 28	0,46 kN
SRS 2G ME 32- 35	0,46 kN
SRS 2G ME 40- 45	0,46 kN
SRS 2G ME 48- 52	0,46 kN
SRS 2G ME 52- 58	0,46 kN
SRS 2G ME 60- 64	0,46 kN
SRS 2G ME 67- 72	0,90 kN
SRS 2G ME 73- 80	0,90 kN
SRS 2G ME 81- 87	0,90 kN
SRS 2G ME 86- 91	0,90 kN
SRS 2G ME 102-108	0,90 kN
SRS 2G ME 110-115	1,00 kN
SRS 2G ME 120-128	1,00 kN
SRS 2G ME 135-143	1,00 kN

Type	-V{Z,perm.}
SRS 2G ME 149-161	1,00 kN
SRS 2G ME 162-170	1,00 kN
SRS 2G ME 198-207	1,00 kN
SRS 2G ME 207-219	1,00 kN

Types

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
SRS 2G ME 12- 15	12,00 mm	15,00 mm	DN 8 (1/4")	0,05 kg/pcs.	100 pcs.	159368
SRS 2G ME 15- 19	15,00 mm	19,00 mm	DN 10 (3/8")	0,054 kg/pcs.	100 pcs.	159377
SRS 2G ME 20- 23	20,00 mm	23,00 mm	DN 15 (1/2")	0,057 kg/pcs.	100 pcs.	159386
SRS 2G ME 25- 28	25,00 mm	28,00 mm	DN 20 (3/4")	0,065 kg/pcs.	100 pcs.	159395
SRS 2G ME 32- 35	32,00 mm	35,00 mm	DN 25 (1")	0,072 kg/pcs.	100 pcs.	159401
SRS 2G ME 40- 45	40,00 mm	45,00 mm	DN 32 (1 1/4")	0,087 kg/pcs.	50 pcs.	159614
SRS 2G ME 48- 52	48,00 mm	52,00 mm	DN 40 (1 1/2")	0,099 kg/pcs.	50 pcs.	159623
SRS 2G ME 52- 58	52,00 mm	58,00 mm		0,097 kg/pcs.	50 pcs.	179003
SRS 2G ME 60- 64	60,00 mm	64,00 mm	DN 50 (2")	0,111 kg/pcs.	50 pcs.	159632
SRS 2G ME 67- 72	67,00 mm	72,00 mm		0,189 kg/pcs.	25 pcs.	179012
SRS 2G ME 73- 80	73,00 mm	80,00 mm	DN 65 (2 1/2")	0,196 kg/pcs.	25 pcs.	159641
SRS 2G ME 81- 87	81,00 mm	87,00 mm		0,208 kg/pcs.	25 pcs.	192665
SRS 2G ME 86- 91	86,00 mm	91,00 mm	DN 80 (3")	0,215 kg/pcs.	25 pcs.	159650
SRS 2G ME 102-108	102,00 mm	108,00 mm		0,246 kg/pcs.	25 pcs.	179021
SRS 2G ME 110-115	110,00 mm	115,00 mm	DN 100 (4")	0,301 kg/pcs.	25 pcs.	159669
SRS 2G ME 120-128	120,00 mm	128,00 mm		0,344 kg/pcs.	25 pcs.	191459
SRS 2G ME 135-143	135,00 mm	143,00 mm		0,368 kg/pcs.	25 pcs.	191477
SRS 2G ME 149-161	149,00 mm	161,00 mm		0,392 kg/pcs.	25 pcs.	191486
SRS 2G ME 162-170	162,00 mm	170,00 mm		0,404 kg/pcs.	25 pcs.	191468
SRS 2G ME 198-207	198,00 mm	207,00 mm		0,467 kg/pcs.	25 pcs.	191495
SRS 2G ME 207-219	207,00 mm	219,00 mm		0,497 kg/pcs.	20 pcs.	191504

Dimensions

Type	B1	b2	D	D2	e	H	Mi1	Mi2	t
SRS 2G ME 12- 15	54,5 mm	23,5 mm	22 mm	15 mm	39,5 mm	46,5 mm	M8	M10	1,5 mm
SRS 2G ME 15- 19	58,5 mm	23,5 mm	26 mm	19 mm	43,5 mm	50,5 mm	M8	M10	1,5 mm
SRS 2G ME 20- 23	62,5 mm	23,5 mm	30 mm	23 mm	47,5 mm	54,5 mm	M8	M10	1,5 mm
SRS 2G ME 25- 28	68,5 mm	23,5 mm	36 mm	28 mm	53,5 mm	60,5 mm	M8	M10	1,5 mm
SRS 2G ME 32- 35	76 mm	23,5 mm	44 mm	35 mm	61 mm	68,5 mm	M8	M10	1,5 mm

Type	B1	b2	D	D2	e	H	Mi1	Mi2	t
SRS 2G ME 40- 45	91,5 mm	23,5 mm	52 mm	45 mm	74,5 mm	76,5 mm	M8	M10	1,5 mm
SRS 2G ME 48- 52	99 mm	23,5 mm	60 mm	52 mm	82 mm	84,5 mm	M8	M10	1,5 mm
SRS 2G ME 52- 58	105 mm	23,5 mm	66 mm	58 mm	88 mm	90,5 mm	M8	M10	1,5 mm
SRS 2G ME 60- 64	112 mm	23,5 mm	72 mm	64 mm	95 mm	96,5 mm	M8	M10	1,5 mm
SRS 2G ME 67- 72	125 mm	28 mm	80 mm	72 mm	105 mm	106,5 mm	M8	M10	2 mm
SRS 2G ME 73- 80	134 mm	28 mm	88 mm	80 mm	114 mm	114,5 mm	M8	M10	2 mm
SRS 2G ME 81- 87	141 mm	28 mm	97 mm	87 mm	121 mm	123,5 mm	M8	M10	2 mm
SRS 2G ME 86- 91	146,5 mm	28 mm	99 mm	91 mm	126,5 mm	125,5 mm	M8	M10	2 mm
SRS 2G ME 102-108	159,5 mm	28 mm	115 mm	108 mm	139,5 mm	141,5 mm	M8	M10	2 mm
SRS 2G ME 110-115	173 mm	28 mm	124 mm	115 mm	153 mm	152,5 mm	M8	M10	2,5 mm
SRS 2G ME 120-128	186 mm	28 mm	137 mm	128 mm	166 mm	165,5 mm	M8	M10	2,5 mm
SRS 2G ME 135-143	203 mm	28 mm	153 mm	143 mm	183 mm	181,5 mm	M8	M10	2,5 mm
SRS 2G ME 149-161	215 mm	28 mm	166 mm	161 mm	195 mm	194,5 mm	M8	M10	2,5 mm
SRS 2G ME 162-170	229 mm	28 mm	178 mm	170 mm	209 mm	206,5 mm	M8	M10	2,5 mm
SRS 2G ME 198-207	268 mm	28 mm	216 mm	207 mm	248 mm	244,5 mm	M8	M10	2,5 mm
SRS 2G ME 207-219	282 mm	28 mm	230 mm	219 mm	262 mm	258,5 mm	M8	M10	2,5 mm

Certification

