


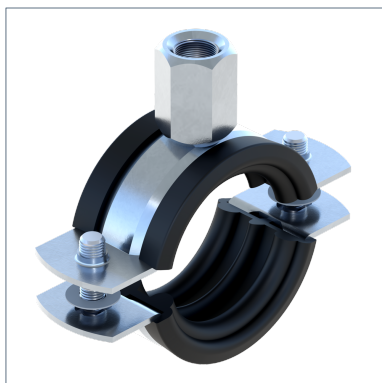

General Information

Two-piece pipe clamp with double thread connection (M8/M10) and sound absorption lining for the installation of pipelines. Applicable for sound-absorbed installations according to DIN 4109 specifications.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Isolating element material	SBR/EPDM
Connecting element material	steel
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
ERS ME 11 - 15	0,55 kN
ERS ME 15 - 19	0,55 kN
ERS ME 20 - 24	0,55 kN
ERS ME 25 - 28	0,55 kN
ERS ME 32 - 35	0,55 kN
ERS ME 39 - 46	0,80 kN
ERS ME 48 - 53	0,80 kN
ERS ME 54 - 58	0,80 kN
ERS ME 59 - 66	0,80 kN
ERS ME 75 - 80	0,90 kN
ERS ME 87 - 92	0,90 kN
ERS ME 107 - 115	0,90 kN

Types

Type	Size min.	Size max.	DN	Thread connection	Weight	Quantity	Part number
ERS ME 11 - 15	11,00 mm	15,00 mm	DN 8 (1/4")	M8/M10	0,041 kg/ pcs.	200 pcs.	116766
ERS ME 15 - 19	15,00 mm	19,00 mm	DN 10 (3/8")	M8/M10	0,043 kg/ pcs.	180 pcs.	116767
ERS ME 20 - 24	20,00 mm	24,00 mm	DN 15 (1/2")	M8/M10	0,047 kg/ pcs.	170 pcs.	116768

Type	Size min.	Size max.	DN	Thread connection	Weight	Quantity	Part number
ERS ME 25 - 28	25,00 mm	28,00 mm	DN 20 (3/4")	M8/M10	0,052 kg/ pcs.	130 pcs.	116769
ERS ME 32 - 35	32,00 mm	35,00 mm	DN 25 (1")	M8/M10	0,057 kg/ pcs.	120 pcs.	116771
ERS ME 39 - 46	39,00 mm	46,00 mm	DN 32 (1 1/4")	M8/M10	0,077 kg/ pcs.	90 pcs.	116772
ERS ME 48 - 53	48,00 mm	53,00 mm	DN 40 (1 1/2")	M8/M10	0,084 kg/ pcs.	70 pcs.	116773
ERS ME 54 - 58	54,00 mm	58,00 mm		M8/M10	0,09 kg/ pcs.	50 pcs.	116774
ERS ME 59 - 66	59,00 mm	66,00 mm	DN 50 (2")	M8/M10	0,094 kg/ pcs.	50 pcs.	116775
ERS ME 75 - 80	75,00 mm	80,00 mm	DN 65 (2 1/2")	M8/M10	0,124 kg/ pcs.	60 pcs.	116776
ERS ME 87 - 92	87,00 mm	92,00 mm	DN 80 (3")	M8/M10	0,138 kg/ pcs.	50 pcs.	116777
ERS ME 107 - 115	107,00 mm	115,00 mm	DN 100 (4")	M8/M10	0,159 kg/ pcs.	50 pcs.	116778

Dimensions

Type	B1	b2	D	D2	H	Mi1	Mi2	t
ERS ME 11 - 15	54,5 mm	20 mm	15 mm	15 mm	41 mm	M8	M10	1,5 mm
ERS ME 15 - 19	58,5 mm	20 mm	19 mm	19 mm	45 mm	M8	M10	1,5 mm
ERS ME 20 - 24	62,5 mm	20 mm	24 mm	24 mm	49,5 mm	M8	M10	1,5 mm
ERS ME 25 - 28	68,5 mm	20 mm	28 mm	28 mm	54,5 mm	M8	M10	1,5 mm
ERS ME 32 - 35	76 mm	20 mm	35 mm	35 mm	61,5 mm	M8	M10	1,5 mm
ERS ME 39 - 46	91,5 mm	20 mm	46 mm	46 mm	71,5 mm	M8	M10	1,5 mm
ERS ME 48 - 53	99 mm	20 mm	53 mm	53 mm	78,5 mm	M8	M10	1,5 mm
ERS ME 54 - 58	105 mm	20 mm	58 mm	58 mm	84 mm	M8	M10	1,5 mm
ERS ME 59 - 66	112 mm	25 mm	66 mm	66 mm	92 mm	M8	M10	2 mm
ERS ME 75 - 80	134 mm	25 mm	80 mm	80 mm	107 mm	M8	M10	2 mm
ERS ME 87 - 92	146,5 mm	25 mm	92 mm	92 mm	119,5 mm	M8	M10	2 mm
ERS ME 107 - 115	173 mm	25 mm	115 mm	115 mm	145 mm	M8	M10	2,5 mm

Certification

