



Technical Data

For pipes of NB 100 or larger having to be spaced at a distance from the Slide Set, or under conditions of reversed bending stress, the 3G triple thread nuts are to be secured by screwing on a 1/2" Locking Nut.

Technical Data

Permissible load for ceiling mounting:	5.0 kN
Permissible load for floor mounting:	9.0 kN
Permissible bending moment for wall mounting* for H3G2:	350 Nm
Temperature range (permanent exposure):	130°C

Version GS:

Static friction coefficient μ_0 :	0.18
Sliding friction coefficient μ :	0.14


Version GS ULTRAGlide:

Static friction coefficient μ_0 :	0.07
Sliding friction coefficient μ :	0.07

Material:

Metal components:	Steel, electro-galvanised
Slide bar:	Polyamide, glass fibre reinforced With additional Nano coating

* The permissible bending moment of the connecting element (threaded rod or threaded tube) may restrict the application!

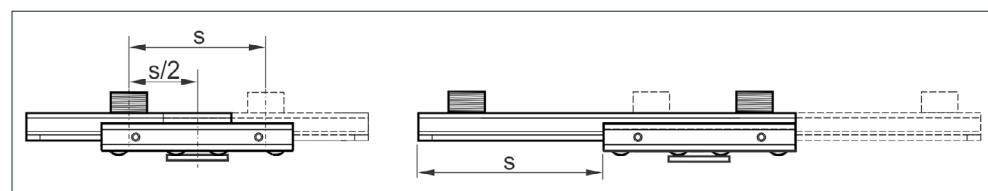

Type	max. lever arm [mm]	max. lever arm ULTRAGlide [mm]	max. slide path s [mm]
H3G	250	400	100
H3G2	250	400	135
FWD 30 [N]		FWD 60 [N]	FWD 120 [N]
≤ 1.000		≤ 540	≤ 360
			≤ 260

FZ = max. adm. tensile load

* The load capacity of the connecting elements used is to be respected, this applies in particular under stress of fire.