



Technical Data

For pipes of NB 100 or larger having to be spaced at a distance from the Slide Set, or under conditions of reversed bending stress, the 3G triple thread nuts are to be secured by screwing on a 1/2" Locking Nut.

Technical Data

Permissible load for ceiling mounting: 5.0 kN
 Permissible load for floor mounting: 9.0 kN
 Temperature range (permanent exposure): 130°C

Version GS:


Static friction coefficient μ_0 : 0.18
 Sliding friction coefficient μ : 0.14

Version GS ULTRAGlide:

Static friction coefficient μ_0 : 0.07
 Sliding friction coefficient μ : 0.07

Material:

Metal components: Steel, electro-galvanised
 Slide bar: Polyamide, glass fibre reinforced With additional Nano coating

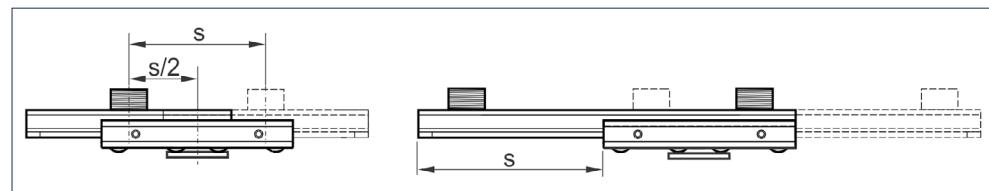

Type	max. lever arm [mm]	max. lever arm ULTRAGlide [mm]	max. slide path s [mm]
H3G	250	400	100
H3G2	250	400	135

Adm. load FZ * under stress of fire

FWD 30 [N]	FWD 60 [N]	FWD 90 [N]	FWD 120 [N]
≤ 1.000	≤ 540	≤ 360	≤ 260

FZ = max. adm. tensile load

* The load capacity of the connecting elements used is to be respected, this applies in particular under stress of fire.