


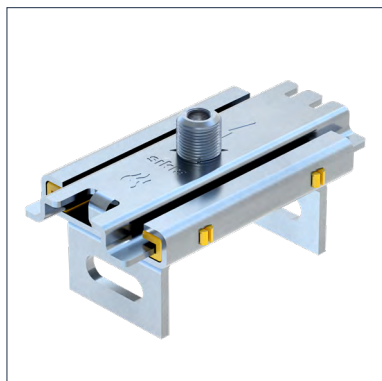


Installation

Pipe clamp connection points "2G" receive M10 studs or M16 by adapter connection.

Technical Data

Type	a [mm]	b [mm]	c [mm]
GS F 80 2G2	150	67	70.0
GS F 100 2G2	150	67	75.5

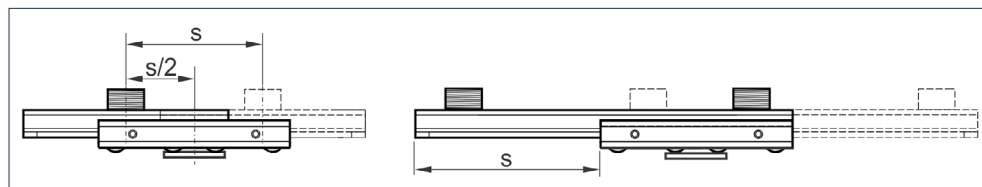

Type	Max. lever arm [mm]	Max. glide path s [mm]
GS F 80 2G	150	100
GS F 80 2G2	150	135
GS F 100 2G2	150	135

Perm. load elevated position: 1.2 kN
 Perm. load suspended position: 0.6 kN
 Permanent temperature range: 130° C
 Static friction coefficient μ_0 : 0.20
 Sliding friction coefficient μ : 0.15