


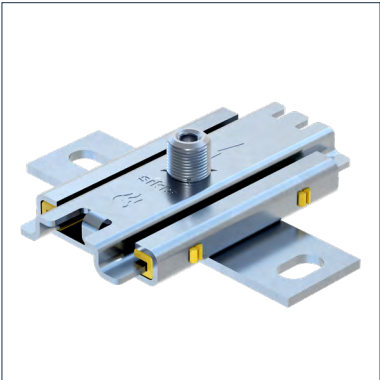


Technical Data

Permissible load for ceiling mounting: 0.6 kN
Permissible load for floor mounting: 1.2 kN
Temperature range (permanent exposure): 130°C

Version GS:
Static friction coefficient μ_0 : 0.18
Sliding friction coefficient μ : 0.14

Version GS ULTRAglide:
Static friction coefficient μ_0 : 0.07
Sliding friction coefficient μ : 0.07

Material:
Metal components: Steel, electro-galvanised
Slide bar: Polyamide, glass fibre reinforced
With additional Nano coating

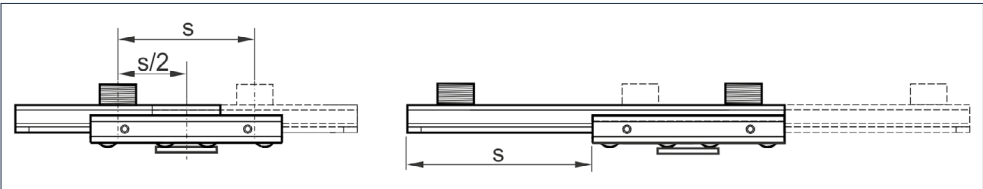

Type	max. lever arm [mm]	max. lever arm ULTRAglide [mm]	max. slide path s [mm]
2G	150	300	85
2G2	150	300	140

Adm. load FZ * under stress of fire

FWD 30 [N]	FWD 60 [N]	FWD 90 [N]	FWD 120 [N]
≤ 600	≤ 430	≤ 280	≤ 200

FZ = max. adm. tensile load

* The load capacity of the connecting elements used is to be respected, this applies in particular under stress of fire.