

Support Bracket WK 400-550 HCP





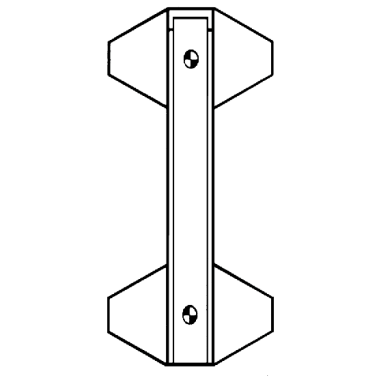

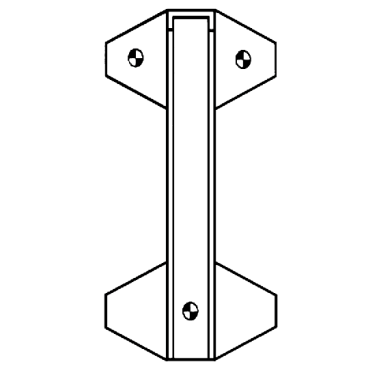

General Information

Sikla Support Brackets may be used for wall, floor and overhead pipe installations. Depending on the site, pipes may lie on the support bracket (U-bolt), be arranged in vertical position or be suspended (Grub Screws). In combination with bolted-on channels, the support brackets offer a wide range of possibilities for cantilever arrangements. In addition, the load capacity of crossbars can be increased by fixing them onto Support Brackets.

Mechanical Properties

Permissible stress σ{perm.}	160.00 N/mm²

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Note on loadings

For load values, see additional documents.

Types

Type	Weight	Quantity	Part number
WK 725/400 HCP	12.719 kg/pcs.	1 pcs.	151041
WK 880/550 HCP	18.433 kg/pcs.	1 pcs.	151050

Dimensions

Type	b	BP	BP2	bP	d	d1	H	H1	H2	L	L1	L2	L3	tP
WK 725/400 HCP	17 mm	220 mm	150 mm	17 mm	17 mm	11 mm	400 mm	60 mm	340 mm	725 mm	138 mm	368 mm	598 mm	8 mm
WK 880/550 HCP	17 mm	270 mm	200 mm	17 mm	17 mm	11 mm	550 mm	80 mm	470 mm	880 mm	165 mm	445 mm	725 mm	10 mm

Certification

Support Bracket WK 400-550 HCP

Documents

Angle Bracket WK - Sikla Product Details (725-400)