

# Fixing Bracket MW S HCP

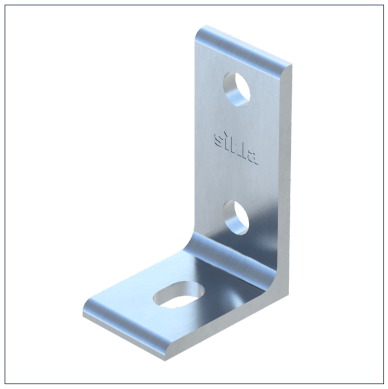

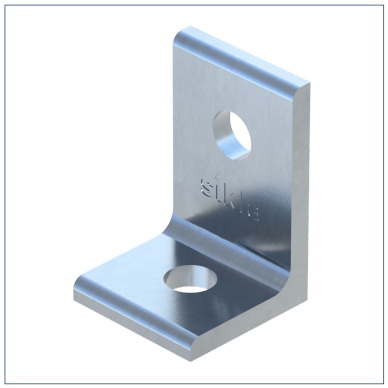

## General Information

Designed for general mounting purposes as a direct lateral attachment link integrated in binding and bridging beams of concrete or wood, and for similar applications. It may serve as a connecting bracket for framework structures consisting of channels.

## Installation

For sprinkler systems smaller than DN 150.

## Material Properties

| | |
|---|---|
| Halogen-free | 0 |
| UV-resistant | 0 |

## Material

| | |
|---|---|
| Primary element material | steel |
| Surface finish | HCP |
| Corrosion protection class | C4 |

## Forces

| Type | V{Z,perm.} |
|---|---|
| MW S 60/40/90° HCP | 7.50 kN |
| MW S 90/60/90° HCP | 7.50 kN |

## Types

| Type | Weight | Quantity | Part number |
|---|---|---|---|
| MW S 60/40/90° HCP | 0.185 kg/pcs. | 25 pcs. | 162063 |
| MW S 90/60/90° HCP | 0.273 kg/pcs. | 25 pcs. | 162072 |

## Dimensions

| Type | B | b | d | H1 | H2 | L1 |
|---|---|---|---|---|---|---|
| MW S 60/40/90° HCP | 40 mm | | 13 mm | 20 mm | | 20 mm |
| MW S 90/60/90° HCP | 40 mm | 13 mm | 13 mm | 15 mm | 50 mm | 26.5 mm |

## Certification

Stahl

epd-global
Powered by EPD-Norway

## Documents

Installation - Fixing Bracket MW S