
Support Bracket WK 100-150 HCP



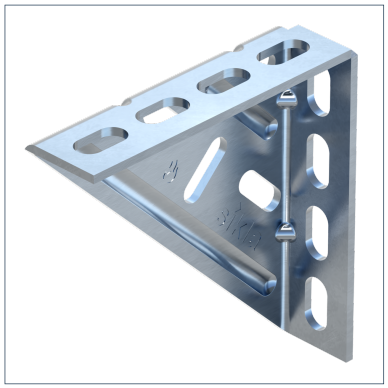

General Information

Sikla Support Brackets may be used for wall, floor and overhead pipe installations. Depending on the site, pipes may lie on the support bracket (U-bolt), be arranged in vertical position or be suspended (Grub Screws). In combination with bolted-on channels, the support brackets offer a wide range of possibilities for cantilever arrangements. In addition, the load capacity of crossbars can be increased by fixing them onto Support Brackets.

Mechanical Properties

Permissible stress σ{perm.}	160.00 N/mm²

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Types

Type	Weight	Quantity	Part number
WK 100/100-40 HCP	0.212 kg/pcs.	25 pcs.	163930
WK 150/150 HCP	0.611 kg/pcs.	25 pcs.	181685

Dimensions

Type	B	b	H	H1	H2	H3	H4	L	L1	L2	L3	L4	t
WK 100/100-40 HCP	40 mm	11 mm	100 mm	23.5 mm	53.5 mm	83.5 mm		100 mm	23.5 mm	53.5 mm	83.5 mm		2.5 mm
WK 150/150 HCP	40 mm	13 mm	150 mm	25.25 mm	59.75 mm	94.25 mm	128.75 mm	150 mm	25.25 mm	59.75 mm	94.25 mm	128.75 mm	4 mm

Certification

Support Bracket WK 100-150 HCP

Documents

Angle Bracket WK - Sikla Product Details (100-100, 150-150)