

Assembly Group BG51 F 80 HCP



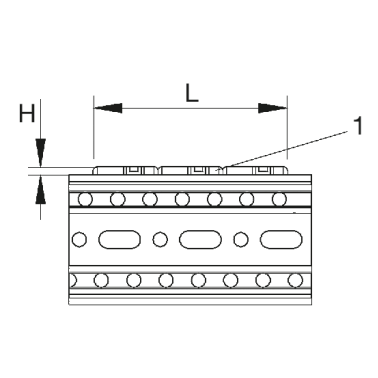

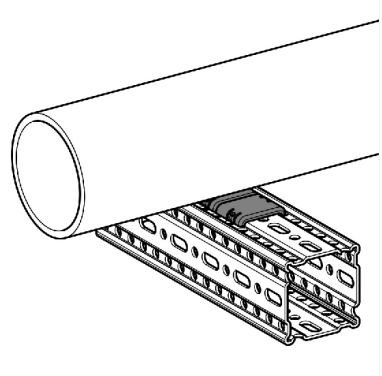

General Information

An Assembly Group for the supporting of pipes without complex requirements and without heat insulation. This allows free sliding of the pipe in all dimensions on the Beam Section TP F 80.

Installation

According to the anticipated sideways movement of the supported pipes, 1 to 3 U-UB pads should be clicked into the beam section.

Number U-UB pad	Lenght L [mm]	Height H [mm]
1	40	5
2	80	5
3	120	5

Temperature

Max. temperature	130 °C
Min. temperature	-20 °C

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	PA
Surface finish	HCP
Corrosion protection class	C4

Types

Type	DN	Weight	Quantity	Part number
BG51 F 80 DN 15 - DN 150 HCP	DN 15 (1/2")	0.020 kg/pcs.	1 pcs.	112742

Dimensions

Type	H	L
BG51 F 80 DN 15 - DN 150 HCP	5 mm	40 mm

Certification

