
Slide Set GS F 80 1G HCP

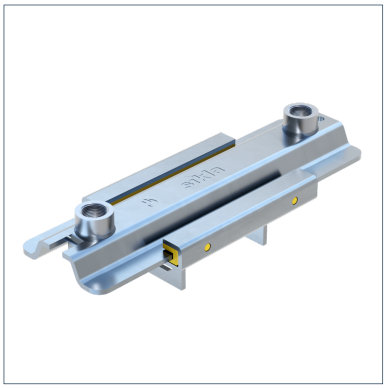

General Information


Heavy-duty Slide Set for single and double-connection to siFramo TP F 80 beam sections. 1/2' thread connection allows direct connection to pipe clamp Stabil I -1/2' by means of threaded tube without further adaption parts.

Installation

Fastening to TP F support profile using two Self-Forming Srews FLS F.

Temperature

Permissible long-term temperature	130 °C

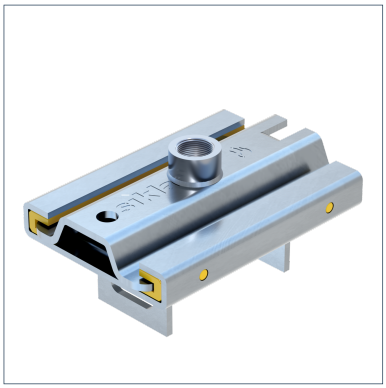


Mechanical Properties

Static friction µ0	0,2

Material Properties

Halogen-free	0
UV-resistant	0

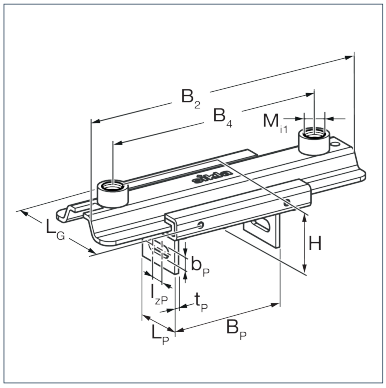


Material

Primary element material	steel
Sliding element material	PA GF
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{Z,perm.}	V{Z,perm.}
GS F 80 1G HCP	5.40 kN	17.00 kN
GS F 80 1G2 HCP	8.40 kN	12.00 kN

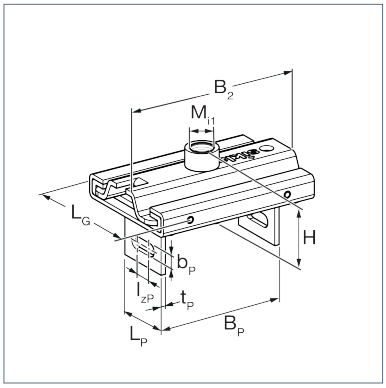

Types

Type	Max. lever arm	Max. slide path	Thread connection	Weight	Quantity	Part number
GS F 80 1G HCP	200.00 mm	100.00 mm	1/2"	1.370 kg/ pcs.	10 pcs.	113885
GS F 80 1G2 HCP	300.00 mm	135.00 mm	1/2"	1.800 kg/ pcs.	10 pcs.	113886

Slide Set GS F 80 1G HCP

Dimensions

Type	B2	B4	BP	bP	H	LP	Mi1	tP
GS F 80 1G HCP	150 mm		89.5 mm	11 mm	46.5 mm	50 mm	1/2"	4 mm
GS F 80 1G2 HCP	275 mm	210 mm	89.5 mm	11 mm	46.5 mm	50 mm	1/2"	4 mm

Certification

Documents

Installation - Slide Set GS F 1G