

Slide Support GA 41-46





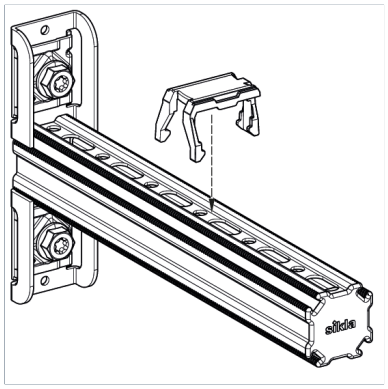

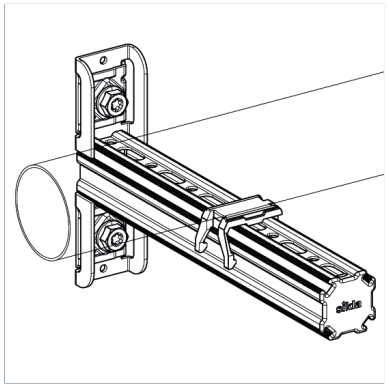

General Information

Plastic protection pad for thermal and galvanic separation (to prevent contact corrosion) in conjunction with the Profile PRO 46, can be used as a Pipe Shoe and, in combination with U Bolts on the Profile PRO 46, can be used as a Guided Pipe Shoe.

Temperature

Max. temperature	130 °C
Min. temperature	-20 °C

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	PA GF
Surface finish	uncoated
Corrosion protection class	C4

Types

Type	Weight	Quantity	Part number
GA 41-46	0.005 kg/pcs.	50 pcs.	803871

Dimensions

Type	H	L1
GA 41-46	6 mm	28.5 mm