

Round Rod Coupling AD RD

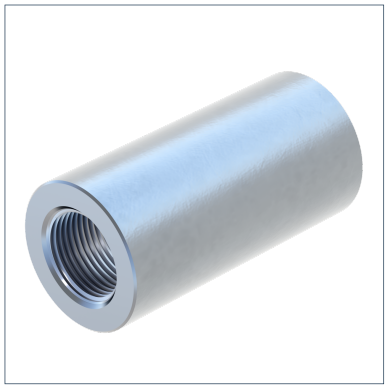

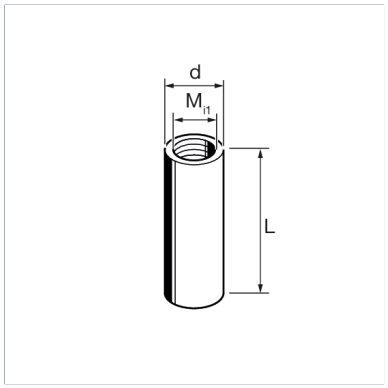

General Information

Element for joining two threaded rods, threaded tubes, as well as distance, e.g. in combination with Slide Set and Pipe Clamp.

Installation

During assembly the Rod Coupling has to be locked with two hexagon nuts (not included in scope of delivery).
Recommended tightening torque: 15 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Types

Type	L	Weight	Quantity	Part number
AD RD M 8 X 30	30 mm	0.012 kg/pcs.	100 pcs.	157232
AD RD M10 X 30	30 mm	0.015 kg/pcs.	100 pcs.	157250
AD RD M12 X 35	35 mm	0.021 kg/pcs.	50 pcs.	157278
AD RD M16 X 45	45 mm	0.072 kg/pcs.	50 pcs.	157296

Dimensions

Type	D	L	Mi1
AD RD M 8 X 30	11 mm	30 mm	M8
AD RD M10 X 30	13 mm	30 mm	M10
AD RD M12 X 35	15 mm	35 mm	M12
AD RD M16 X 45	22 mm	45 mm	M16

Certification