



Slide Set GS H3G

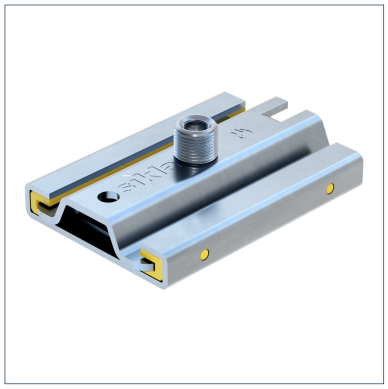

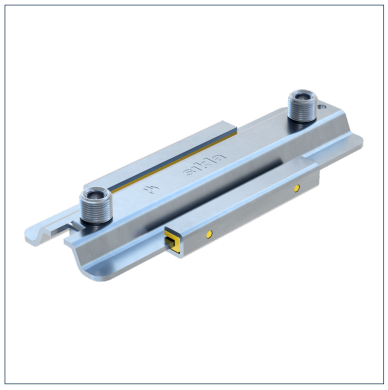

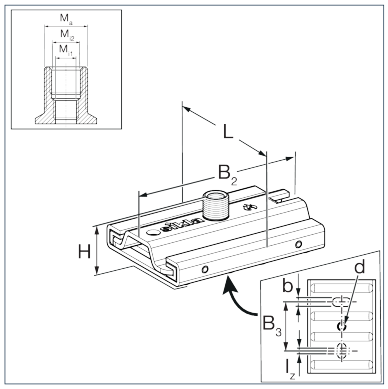

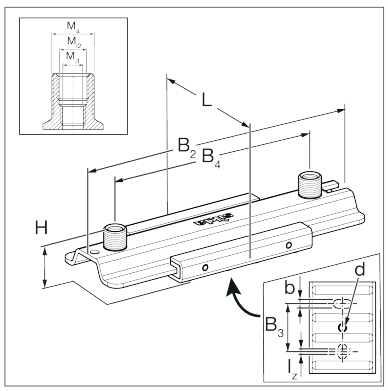

General Information

Heavy-duty Slide Set for plant construction. To be used preferably in combination with Sikla Pipe Clamp Stabil D-3G and Chilled Water Clamp SKS Top-2C. Various connection options of the pipe clamps depending on the respective load: M12, M16 or with 1/2' adapters using the external thread (see Adapter AD f/f). Sound absorption by means of glass fibre reinforced polyamide slide rails. Especially suitable for ceiling and floor mounting solutions and as a guide for rising pipes. For wall mounting, we recommend the use of the Slide Set H3G on Sikla Support Bracket.

Installation

For pipes of DN 100 or larger having to be spaced at a distance from the Slide Set, or under conditions of reversed bending stress, the 3G triple thread nuts are to be secured by screwing on a 1/2' Locking Nut.

Temperature

Permissible long-term temperature	130 °C

Mechanical Properties

Static friction µ0	0,18

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Sliding element material	PA GF
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}	V{Z,perm.}
GS H3G	5.00 kN	9.00 kN
GS H3G2	5.00 kN	9.00 kN

Moments

Type	M{X,perm.}
GS H3G2	0.35 kNm

Note on loadings

The permissible bending moment of the connecting element (threaded rod or threaded tube) may restrict the application!

Fire resistance

Type	Fire Resistance 30 min	Fire Resistance 60 min	Fire Resistance 90 min	Fire Resistance 120 min
GS H3G	1 kN	0.54 kN	0.36 kN	0.26 kN
GS H3G2	1 kN	0.54 kN	0.36 kN	0.26 kN

Types

Type	Max. lever arm	Max. slide path	Thread connection	Weight	Quantity	Part number
GS H3G	250.00 mm	100.00 mm	M12/M16/1/2"	1.161 kg/pcs.	10 pcs.	149295
GS H3G2	250.00 mm	135.00 mm	M12/M16/1/2"	1.581 kg/pcs.	10 pcs.	126700

Dimensions

Type	b	B2	B3	B4	d	H	L	lz	Mi1	Mi2	Ma
GS H3G	13 mm	150 mm	73 mm		13 mm	49.5 mm	102 mm	10 mm	M12	M16	1/2"
GS H3G2	13 mm	275 mm	73 mm	210 mm	13 mm	49.5 mm	102 mm	10 mm	M12	M16	1/2"

Certification