


Duo Clamp SRS 2G mE



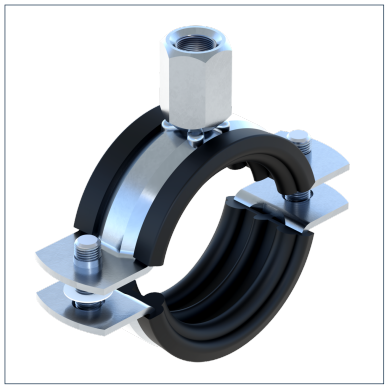

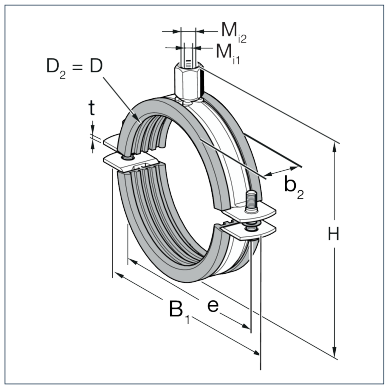

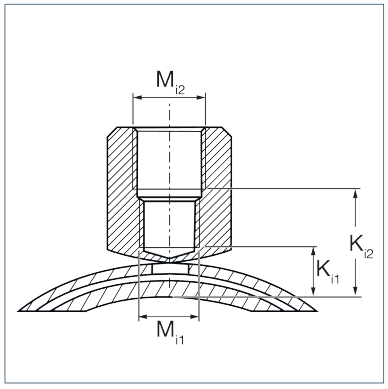

General Information

Two-piece pipe clamp with double thread connection (M8/M10) and sound absorption lining for the installation of pipelines. Applicable for sound-absorbed installations according to DIN 4109 specifications.

Installation

Tightening torque: 2 Nm

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Isolating element material	SBR/EPDM
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
SRS 2G ME 12- 15	0.46 kN
SRS 2G ME 15- 19	0.46 kN
SRS 2G ME 20- 23	0.46 kN
SRS 2G ME 25- 28	0.46 kN
SRS 2G ME 32- 35	0.46 kN
SRS 2G ME 40- 45	0.46 kN
SRS 2G ME 48- 52	0.46 kN
SRS 2G ME 52- 58	0.46 kN
SRS 2G ME 60- 64	0.46 kN
SRS 2G ME 67- 72	0.90 kN
SRS 2G ME 73- 80	0.90 kN
SRS 2G ME 86- 91	0.90 kN
SRS 2G ME 102-108	0.90 kN
SRS 2G ME 110-115	1.00 kN
SRS 2G ME 120-128	1.00 kN
SRS 2G ME 135-143	1.00 kN
SRS 2G ME 149-161	1.00 kN

Duo Clamp SRS 2G mE

Type	-V{Z,perm.}
SRS 2G ME 162-170	1.00 kN
SRS 2G ME 198-207	1.00 kN
SRS 2G ME 207-219	1.00 kN

Types

Type	Size min.	Size max.	DN	Weight	Quantity	Part number
SRS 2G ME 12- 15	12.00 mm	15.00 mm	DN 8 (1/4")	0.050 kg/pcs.	100 pcs.	159368
SRS 2G ME 15- 19	15.00 mm	19.00 mm	DN 10 (3/8")	0.054 kg/pcs.	100 pcs.	159377
SRS 2G ME 20- 23	20.00 mm	23.00 mm	DN 15 (1/2")	0.057 kg/pcs.	100 pcs.	159386
SRS 2G ME 25- 28	25.00 mm	28.00 mm	DN 20 (3/4")	0.065 kg/pcs.	100 pcs.	159395
SRS 2G ME 32- 35	32.00 mm	35.00 mm	DN 25 (1")	0.072 kg/pcs.	100 pcs.	159401
SRS 2G ME 40- 45	40.00 mm	45.00 mm	DN 32 (1 1/4")	0.087 kg/pcs.	50 pcs.	159614
SRS 2G ME 48- 52	48.00 mm	52.00 mm	DN 40 (1 1/2")	0.099 kg/pcs.	50 pcs.	159623
SRS 2G ME 52- 58	52.00 mm	58.00 mm		0.097 kg/pcs.	50 pcs.	179003
SRS 2G ME 60- 64	60.00 mm	64.00 mm	DN 50 (2")	0.111 kg/pcs.	50 pcs.	159632
SRS 2G ME 67- 72	67.00 mm	72.00 mm		0.189 kg/pcs.	25 pcs.	179012
SRS 2G ME 73- 80	73.00 mm	80.00 mm	DN 65 (2 1/2")	0.196 kg/pcs.	25 pcs.	159641
SRS 2G ME 86- 91	86.00 mm	91.00 mm	DN 80 (3")	0.215 kg/pcs.	25 pcs.	159650
SRS 2G ME 102-108	102.00 mm	108.00 mm		0.246 kg/pcs.	25 pcs.	179021
SRS 2G ME 110-115	110.00 mm	115.00 mm	DN 100 (4")	0.301 kg/pcs.	25 pcs.	159669
SRS 2G ME 120-128	120.00 mm	128.00 mm		0.344 kg/pcs.	25 pcs.	191459
SRS 2G ME 135-143	135.00 mm	143.00 mm		0.368 kg/pcs.	25 pcs.	191477
SRS 2G ME 149-161	149.00 mm	161.00 mm		0.392 kg/pcs.	25 pcs.	191486
SRS 2G ME 162-170	162.00 mm	170.00 mm		0.404 kg/pcs.	25 pcs.	191468
SRS 2G ME 198-207	198.00 mm	207.00 mm		0.467 kg/pcs.	25 pcs.	191495
SRS 2G ME 207-219	207.00 mm	219.00 mm		0.497 kg/pcs.	20 pcs.	191504

Dimensions

Type	B1	b2	D	D2	e	H	Mi1	Mi2	t	Ki1	Ki2
SRS 2G ME 12- 15	54.5 mm	23.5 mm	22 mm	15 mm	39.5 mm	46.5 mm	M8	M10	1.5 mm	7.89 mm	16.53 mm
SRS 2G ME 15- 19	58.5 mm	23.5 mm	26 mm	19 mm	43.5 mm	50.5 mm	M8	M10	1.5 mm	7.89 mm	16.53 mm
SRS 2G ME 20- 23	62.5 mm	23.5 mm	30 mm	23 mm	47.5 mm	54.5 mm	M8	M10	1.5 mm	7.89 mm	16.53 mm
SRS 2G ME 25- 28	68.5 mm	23.5 mm	36 mm	28 mm	53.5 mm	60.5 mm	M8	M10	1.5 mm	7.89 mm	16.53 mm

Duo Clamp SRS 2G mE

Type	B1	b2	D	D2	e	H	Mi1	Mi2	t	Ki1	Ki2
SRS 2G ME 32- 35	76 mm	23.5 mm	44 mm	35 mm	61 mm	68.5 mm	M8	M10	1.5 mm	7.89 mm	16.53 mm
SRS 2G ME 40- 45	91.5 mm	23.5 mm	52 mm	45 mm	74.5 mm	76.5 mm	M8	M10	1.5 mm	7.89 mm	16.53 mm
SRS 2G ME 48- 52	99 mm	23.5 mm	60 mm	52 mm	82 mm	84.5 mm	M8	M10	1.5 mm	7.89 mm	16.53 mm
SRS 2G ME 52- 58	105 mm	23.5 mm	66 mm	58 mm	88 mm	90.5 mm	M8	M10	1.5 mm	7.89 mm	16.53 mm
SRS 2G ME 60- 64	112 mm	23.5 mm	72 mm	64 mm	95 mm	96.5 mm	M8	M10	1.5 mm	7.89 mm	16.53 mm
SRS 2G ME 67- 72	125 mm	28 mm	80 mm	72 mm	105 mm	106.5 mm	M8	M10	2 mm	10.5 mm	19.67 mm
SRS 2G ME 73- 80	134 mm	28 mm	88 mm	80 mm	114 mm	114.5 mm	M8	M10	2 mm	10.5 mm	19.67 mm
SRS 2G ME 86- 91	146.5 mm	28 mm	99 mm	91 mm	126.5 mm	125.5 mm	M8	M10	2 mm	10.5 mm	19.67 mm
SRS 2G ME 102-108	159.5 mm	28 mm	115 mm	108 mm	139.5 mm	141.5 mm	M8	M10	2 mm	10.5 mm	19.67 mm
SRS 2G ME 110-115	173 mm	28 mm	124 mm	115 mm	153 mm	152.5 mm	M8	M10	2.5 mm	11.61 mm	19.33 mm
SRS 2G ME 120-128	186 mm	28 mm	137 mm	128 mm	166 mm	165.5 mm	M8	M10	2.5 mm	11.61 mm	19.33 mm
SRS 2G ME 135-143	203 mm	28 mm	153 mm	143 mm	183 mm	181.5 mm	M8	M10	2.5 mm	11.61 mm	19.33 mm
SRS 2G ME 149-161	215 mm	28 mm	166 mm	161 mm	195 mm	194.5 mm	M8	M10	2.5 mm	11.61 mm	19.33 mm
SRS 2G ME 162-170	229 mm	28 mm	178 mm	170 mm	209 mm	206.5 mm	M8	M10	2.5 mm	11.61 mm	19.33 mm
SRS 2G ME 198-207	268 mm	28 mm	216 mm	207 mm	248 mm	244.5 mm	M8	M10	2.5 mm	11.61 mm	19.33 mm
SRS 2G ME 207-219	282 mm	28 mm	230 mm	219 mm	262 mm	258.5 mm	M8	M10	2.5 mm	11.61 mm	19.33 mm

Certification