
End Support WBD 41 A4

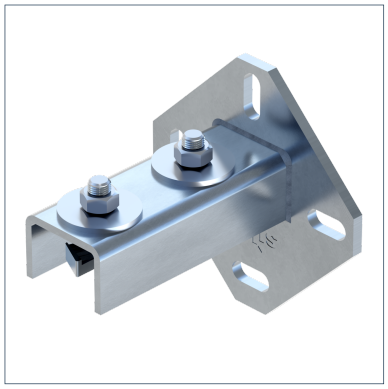

General Information

In combination with a channel, End Support WBD 41 ss is particularly suitable for setting up support structures attached to walls, floors and ceilings as a base for frame structures.

Installation

Normally, two anchors grouped opposite to each other and along the load axis are sufficient. Only in exceptional cases (e.g. high props in frameworks) four anchors are required.
Tightening torque 40 Nm.
Suitable for stainless steel channels with width 41 mm up to height <= 62 mm.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	Stainless Steel A4
Corrosion protection class	CRC II – III (C4 – C5 acc. to DIN EN ISO 12944-2)

Forces

Type	V{X,perm.}
WBD 41 A4	2.00 kN

Types

Type	Weight	Quantity	Part number
WBD 41 A4	0.902 kg/pcs.	10 pcs.	193631

Dimensions

Type	B	BP	BP1	bP	H	HP	HP1	lzP	LG	tP
WBD 41 A4	42 mm	135 mm	100 mm	11 mm	31 mm	135 mm	100 mm	14 mm	131 mm	6 mm

Certification

Documents



Anchor Loads - End Support WBD ss