



Channel Bracket SH 41

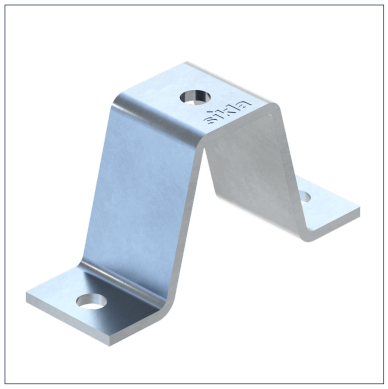

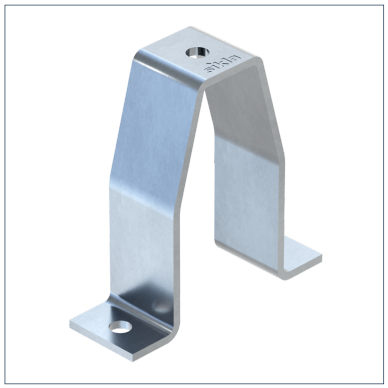

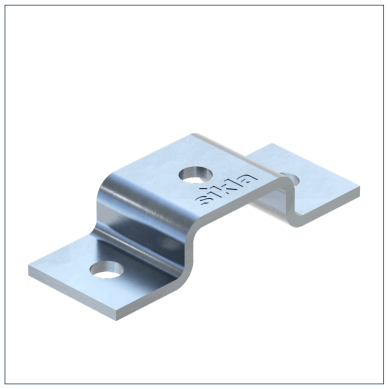

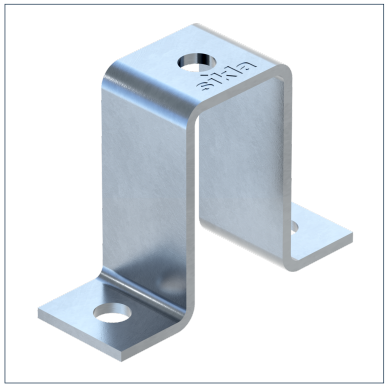

General Information

For fixing Sikla Channels: directly to the building structure or directly onto other channels for frame assembly. When mounting the Channel Holder onto freestanding or embedded channels, we recommend the use of Speed Nut CC bolts.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2


Types


Type	Weight	Quantity	Part number
SH 41/21	0.158 kg/pcs.	50 pcs.	177338
SH 41/31	0.184 kg/pcs.	50 pcs.	113645
SH 41/41,41/21 D	0.202 kg/pcs.	50 pcs.	177365
SH 41/45	0.21 kg/pcs.	50 pcs.	126791
SH 41/52	0.237 kg/pcs.	50 pcs.	177347
SH 41/62	0.281 kg/pcs.	25 pcs.	177356
SH 41/45 D	0.347 kg/pcs.	10 pcs.	125532
SH 41/52 D	0.4 kg/pcs.	10 pcs.	177383
SH 41/62 D	0.429 kg/pcs.	10 pcs.	163000


Dimensions


Type	B	B1	B2	d	L	H	t
SH 41/21	42 mm	111 mm	80 mm	11 mm	40 mm	18.5 mm	4 mm
SH 41/31	42 mm	111 mm	80 mm	11 mm	40 mm	29 mm	4 mm
SH 41/41,41/21 D	42 mm	111 mm	80 mm	11 mm	40 mm	39 mm	4 mm
SH 41/45	42 mm	111 mm	80 mm	11 mm	40 mm	43 mm	4 mm
SH 41/52	42 mm	111 mm	80 mm	11 mm	40 mm	50 mm	4 mm
SH 41/62	42 mm	111 mm	80 mm	11 mm	40 mm	60 mm	4 mm
SH 41/45 D	42 mm	115 mm	84 mm	13 mm	40 mm	88 mm	4 mm
SH 41/52 D	42 mm	115 mm	84 mm	13 mm	40 mm	102 mm	4 mm
SH 41/62 D	42 mm	115 mm	84 mm	13 mm	40 mm	121 mm	4 mm

Channel Bracket SH 41

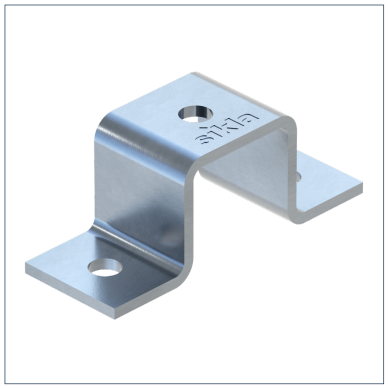

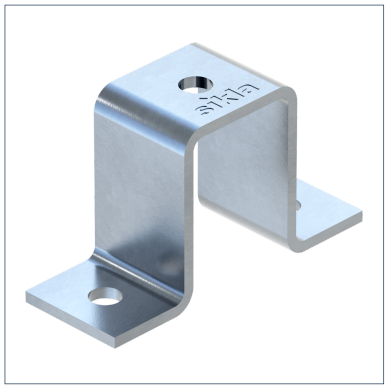

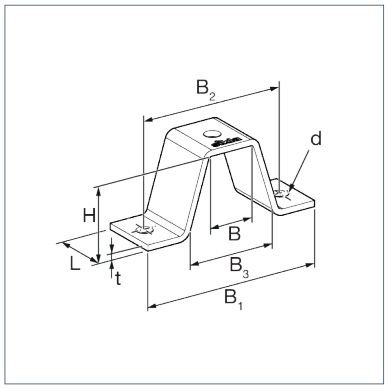

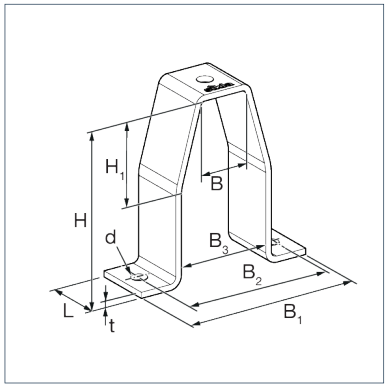

Certification

Channel Bracket SH 41

