
# Support Bracket WK 100-150 HCP



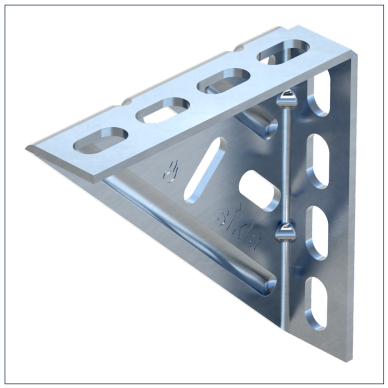

## General Information

Sikla Support Brackets may be used for wall, floor and overhead pipe installations. Depending on the site, pipes may lie on the support bracket (U-bolt), be arranged in vertical position or be suspended (Grub Screws). In combination with bolted-on channels, the support brackets offer a wide range of possibilities for cantilever arrangements. In addition, the load capacity of crossbars can be increased by fixing them onto Support Brackets.

## Mechanical Properties

| | |
|---|---|
| Permissible stress σ{perm.} | 160.00 N/mm² |

## Material Properties

| | |
|---|---|
| Halogen-free | 0 |
| UV-resistant | 0 |

## Material

| | |
|---|---|
| Primary element material | steel |
| Surface finish | HCP |
| Corrosion protection class | C4 |

## Types

| Type | Weight | Quantity | Part number |
|---|---|---|---|
| WK 100/100-40 HCP | 0.212 kg/pcs. | 25 pcs. | 163930 |
| WK 150/150 HCP | 0.611 kg/pcs. | 25 pcs. | 181685 |

## Dimensions

| Type | B | b | H | H1 | H2 | H3 | H4 | L | L1 | L2 | L3 | L4 | t |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| WK 100/100-40 HCP | 40 mm | 11 mm | 100 mm | 23.5 mm | 53.5 mm | 83.5 mm | | 100 mm | 23.5 mm | 53.5 mm | 83.5 mm | | 2.5 mm |
| WK 150/150 HCP | 40 mm | 13 mm | 150 mm | 25.25 mm | 59.75 mm | 94.25 mm | 128.75 mm | 150 mm | 25.25 mm | 59.75 mm | 94.25 mm | 128.75 mm | 4 mm |

## Certification

# Support Bracket WK 100-150 HCP

## Documents

Angle Bracket WK - Sikla Product Details (100-100, 150-150)