



U Bolt Fastening UB F HCP

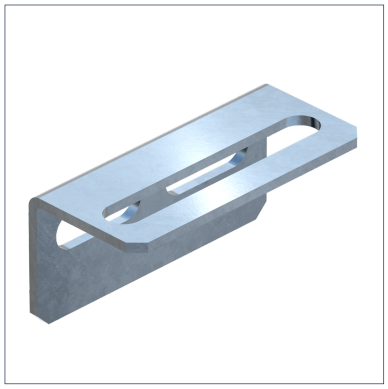

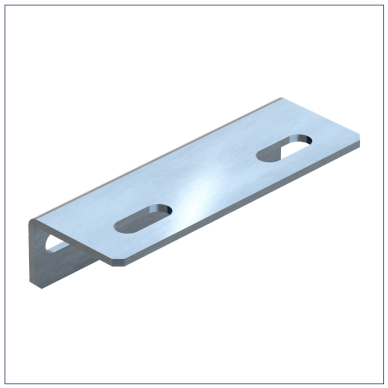

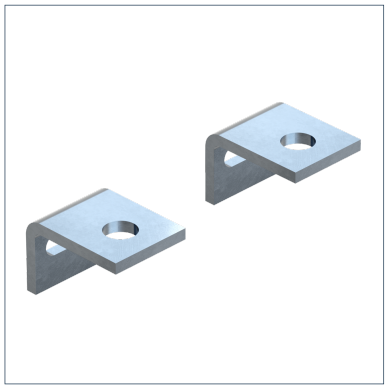

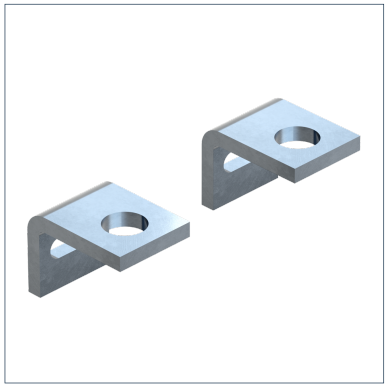

General Information

U Bolt Fastening to connect standard U-Bolts required for pipework to the supporting Beam Sections, Cantilever Brackets and Beam Brackets F80 or F100.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{Z,perm.}
UB F 1/2'' - 1 1/2'' HCP	0.80 kN
UB F 2'' - 3'' HCP	1.70 kN
UB F 4'' - 6'' HCP	2.10 kN
UB F 8'' - 12'' HCP	3.70 kN
UB F 378 - 530 HCP	3.70 kN


Types

Type	Weight	Quantity	Part number
UB F 1/2'' - 1 1/2'' HCP	0.127 kg/pcs.	25 pcs.	192931
UB F 2'' - 3'' HCP	0.453 kg/pcs.	10 pcs.	196212
UB F 4'' - 6'' HCP	0.175 kg/pcs.	20 pcs.	113124
UB F 8'' - 12'' HCP	0.175 kg/pcs.	20 pcs.	113125
UB F 378 - 530 HCP	0.175 kg/pcs.	20 pcs.	113126


Dimensions


Type	H	B	L	t	Iz1	Iz2
UB F 1/2'' - 1 1/2'' HCP	85 mm	40 mm	40 mm	3 mm	20 mm	65 mm
UB F 2'' - 3'' HCP	165 mm	40 mm	60 mm	4 mm	20 mm	20 mm
UB F 4'' - 6'' HCP	45 mm	40 mm	60 mm	6 mm	20 mm	
UB F 8'' - 12'' HCP	45 mm	45 mm	62 mm	8 mm	20 mm	
UB F 378 - 530 HCP	45 mm	45 mm	62 mm	8 mm	20 mm	


U Bolt Fastening UB F HCP

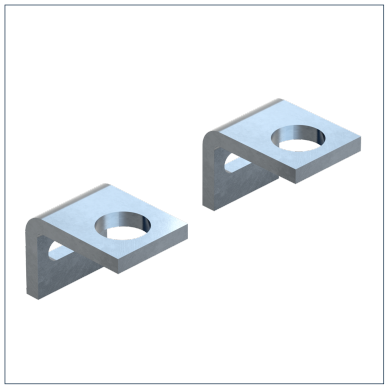

Certification

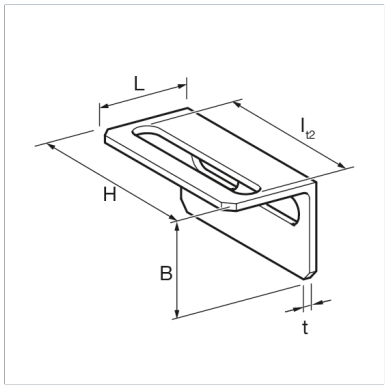

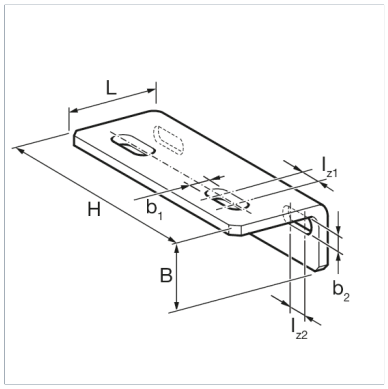

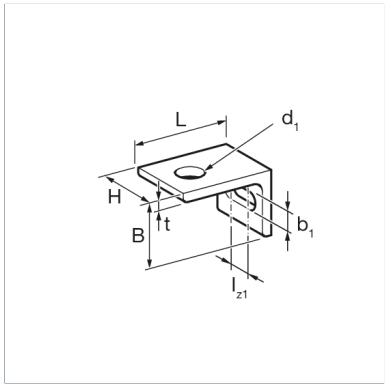

U Bolt Fastening UB F HCP

