


Profile Holder MPH F 80- 46 HCP

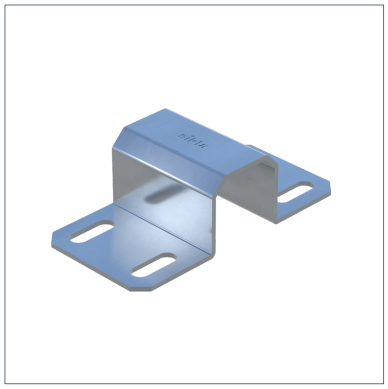

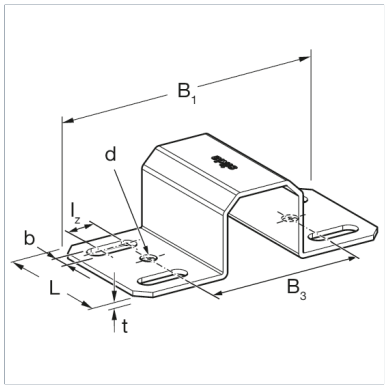

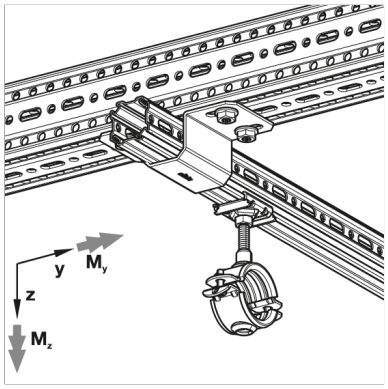

General Information

Implementation of a cross-connection between the siFramo TP F 80 and the siMetrix PRO 46 profile.

Installation

Connection of a Profile PRO 46 to a beam section TP F 80 with self forming screws FLS F.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{X,perm.}	V{X,perm.}	-V{Y,perm.}	V{Y,perm.}	-V{Z,perm.}	V{Z,perm.}
MPH F 80 - 46 HCP	0.23 kN	0.23 kN	15.43 kN	15.43 kN	20.45 kN	20.45 kN

Moments

Type	-M{Y,perm.}	M{Y,perm.}	-M{Z,perm.}	M{Z,perm.}
MPH F 80 - 46 HCP	0.45 kNm	0.45 kNm	0.4 kNm	0.4 kNm

Types

Type	Weight	Quantity	Part number
MPH F 80 - 46 HCP	0.420 kg/pcs.	15 pcs.	802546

Dimensions

Type	b	B1	B3	d	lz	L	t
MPH F 80 - 46 HCP	11 mm	162 mm	94 mm	11 mm	20 mm	80 mm	3 mm

Certification

Profile Holder MPH F 80- 46 HCP

Documents

DoP (EN) - MPH 46