



Beam Clip SPA P1

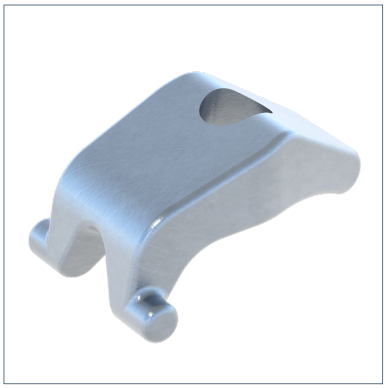

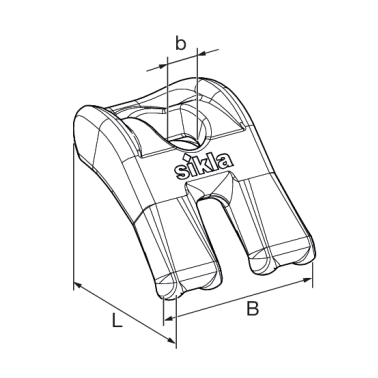

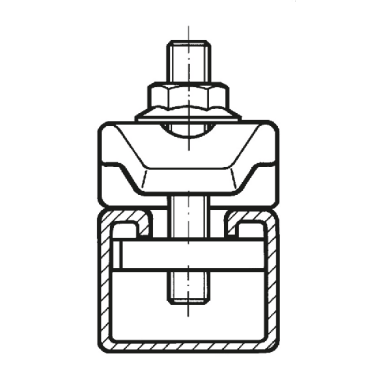

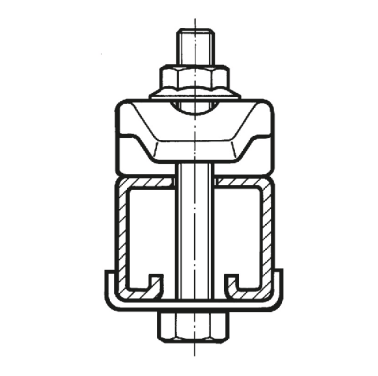

General Information

Universal clamping element for bi-lateral attachment of crossbars for pipe runs, ducts, cable lines and equipment to steel beams. The maximum clamping range may be extended by up to 10 mm by using spacers. Any thicker spacers should be welded to the crossbar.

Installation

Size range: 1 - 23 mm

For further information on installation, see the document with installation instructions.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	cast steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}	V{Z,perm.}
SPA P1	4.00 kN	4.00 kN

Types

Type	Weight	Quantity	Part number
SPA P1	0.1 kg/pcs.	50 pcs.	116196

Dimensions

Type	B	b	L
SPA P1	36 mm	11 mm	50 mm

Certification

epd-global
Powered by EPD-Norway

Documents

Installation - Beam Clip P

Beam Clip SPA P1

