
Universal Plug ANA

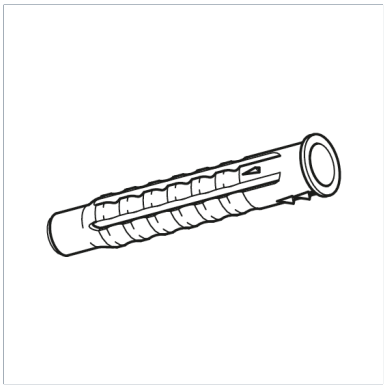

General Information

The Universal Plug with collar is suitable for all concrete material and masonry, perforated and hollow bricks, boards. The torsion protection prevents rotation in the drill hole. The installation in cavities causes a knot and therefore an interlocking connection. The stiff plug neck prevents damage of tiles and plaster. The collar serves as stop an prevents the plug from slipping deeper into the drill hole.

Temperature

Max. temperature	70 °C
Min. temperature	-40 °C

Material Properties

Halogen-free	0
UV-resistant	0

Material

Corrosion protection class	C2

Note on loadings

For information on load values, see documents.

Additional information

Type 6 x 30: Delivery date on request – goods are procured on an order-by-order basis.

Types

Type	L	Screw diameter min./max. (mm)	Weight	Quantity	Part number
ANA 6 X 30	30.00 mm	3,5 / 5,0	0.007 kg/pcs.	100 pcs.	402430
ANA 8 X 40	40.00 mm	4,5 / 6,0	0.001 kg/pcs.	100 pcs.	402431
ANA 10 X 50	50.00 mm	6,0 / 8,0	0.003 kg/pcs.	50 pcs.	402432
ANA 12 X 60	60.00 mm	8,0 / 10,0	0.005 kg/pcs.	25 pcs.	402433
ANA 14 X 70	70.00 mm	10,0 / 12,0	0.008 kg/pcs.	20 pcs.	402434

Certification

epd-global
Powered by EPD-Norway

Documents

Universal Plug ANA - Technical Data