


Washer US A4

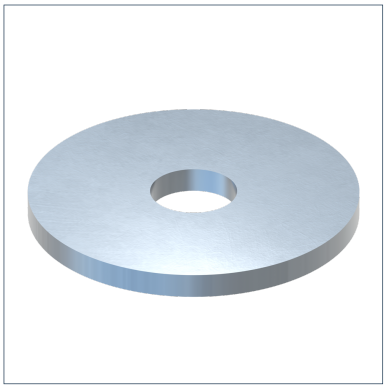

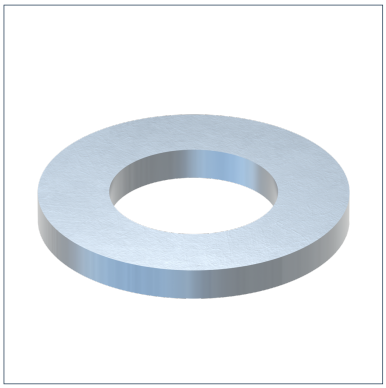

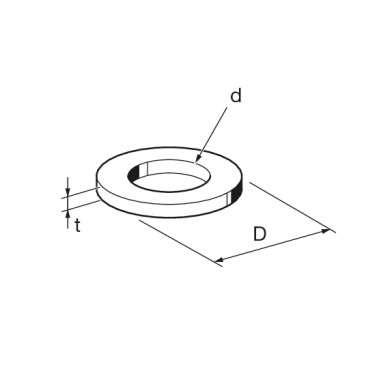

General Information

Sikla washers US are used for the form-fitting and secure support of connecting elements. They enable even force distribution and protect the surface of the fastening components. Suitable for use in combination with screws and threaded rods in various installation situations – especially in constructions with mounting rails and support systems.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	Stainless Steel A4
Corrosion protection class	CRC II – III (C4 – C5 acc. to DIN EN ISO 12944-2)

Types

Type	DIN	Weight	Quantity	Part number
US 8/125 140 HV A4	125	0.002 kg/pcs.	100 pcs.	104766
US 8/9021 100 HV A4	9021	0.006 kg/pcs.	100 pcs.	172019
US 8/40 140 HV A4		0.028 kg/pcs.	100 pcs.	111865
US 10/125 140 HV A4	125	0.003 kg/pcs.	100 pcs.	104775
US 10/9021 100 HV A4	9021	0.011 kg/pcs.	100 pcs.	171740
US 10/40 140 HV A4		0.027 kg/pcs.	100 pcs.	111866
US 12/125 140 HV A4	125	0.006 kg/pcs.	100 pcs.	104784
US 12/40 140 HV A4		0.02 kg/pcs.	100 pcs.	111867
US 16/125 140 HV A4	125	0.01 kg/pcs.	100 pcs.	104809
US 16/9021 100 HV A4	9021	0.041 kg/pcs.	100 pcs.	172028

Dimensions

Type	D	d	t
US 8/125 140 HV A4	16 mm	8.4 mm	1.6 mm
US 8/9021 100 HV A4	24 mm	8.4 mm	2 mm
US 8/40 140 HV A4	40 mm	8.4 mm	3 mm
US 10/125 140 HV A4	20 mm	10.5 mm	2 mm
US 10/9021 100 HV A4	30 mm	10.5 mm	2.5 mm
US 10/40 140 HV A4	40 mm	10.5 mm	3 mm
US 12/125 140 HV A4	24 mm	13 mm	2.5 mm
US 12/40 140 HV A4	40 mm	13 mm	3 mm
US 16/125 140 HV A4	30 mm	17 mm	3 mm

Washer US A4

Type	D	d	t
US 16/9021 100 HV A4	50 mm	17 mm	3 mm

Certification