


Threaded Rod GST DIN 976 4.8 HCP

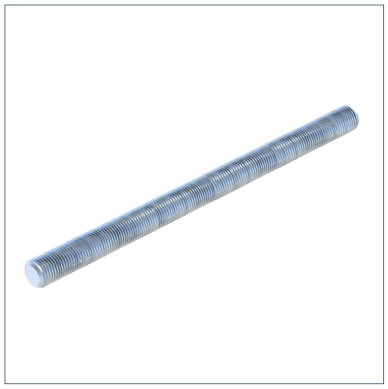

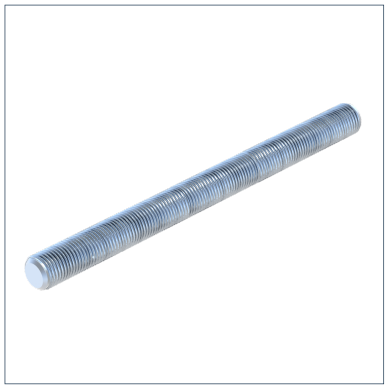

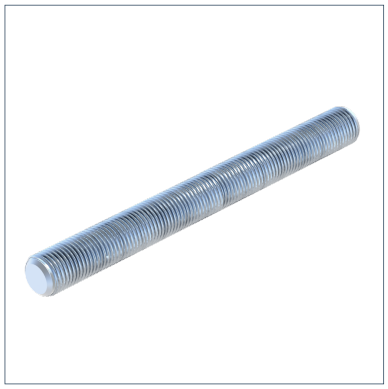

General Information

The threaded rod according to DIN 976, HCP coated, serves as a versatile connecting element for fastening and mounting in technical building equipment and plant engineering. It allows for flexible length adjustments and is often used in combination with pipe clamps, brackets or support systems. The HCP version is suitable for special corrosion protection requirements.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{Z,perm.}
GST M10X 40 DIN 976 4.8 HCP	12.50 kN
GST M10X 70 DIN 976 4.8 HCP	12.50 kN
GST M10X110 DIN 976 4.8 HCP	12.50 kN
GST M10 1M DIN 976 4.8 HCP	12.50 kN
GST M10 2M DIN 976 4.8 HCP	12.50 kN
GST M10 3M DIN 976 4.8 HCP	12.50 kN
GST M12X 70 DIN 976 4.8 HCP	18.10 kN
GST M12X110 DIN 976 4.8 HCP	18.10 kN
GST M12X200 DIN 976 4.8 HCP	18.10 kN
GST M12X250 DIN 976 4.8 HCP	18.10 kN
GST M12X300 DIN 976 4.8 HCP	18.10 kN
GST M12X400 DIN 976 4.8 HCP	18.10 kN
GST M12X500 DIN 976 4.8 HCP	18.10 kN
GST M12 1M DIN 976 4.8 HCP	18.10 kN
GST M12 2M DIN 976 4.8 HCP	18.10 kN
GST M12 3M DIN 976 4.8 HCP	18.10 kN
GST M16 1M DIN 976 4.8 HCP	33.80 kN
GST M16 2M DIN 976 4.8 HCP	33.80 kN
GST M16 3M DIN 976 4.8 HCP	33.80 kN

Threaded Rod GST DIN 976 4.8 HCP

Cross-section values 1

Type	Elastic modulus Wy	Second moment of area Iy
GST M10X 40 DIN 976 4.8 HCP	0.07 cm³	0.03 cm^4
GST M10X 70 DIN 976 4.8 HCP	0.07 cm³	0.03 cm^4
GST M10X110 DIN 976 4.8 HCP	0.07 cm³	0.03 cm^4
GST M10 1M DIN 976 4.8 HCP	0.07 cm³	0.03 cm^4
GST M10 2M DIN 976 4.8 HCP	0.07 cm³	0.03 cm^4
GST M10 3M DIN 976 4.8 HCP	0.07 cm³	0.03 cm^4
GST M12X 70 DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M12X110 DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M12X200 DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M12X250 DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M12X300 DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M12X400 DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M12X500 DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M12 1M DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M12 2M DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M12 3M DIN 976 4.8 HCP	0.12 cm³	0.07 cm^4
GST M16 1M DIN 976 4.8 HCP	0.29 cm³	0.21 cm^4
GST M16 2M DIN 976 4.8 HCP	0.29 cm³	0.21 cm^4
GST M16 3M DIN 976 4.8 HCP	0.29 cm³	0.21 cm^4

Types

Type	L	Weight	Quantity	Part number
GST M10X 40 DIN 976 4.8 HCP	40 mm	0.019 kg/pcs.	100 pcs.	162407
GST M10X 70 DIN 976 4.8 HCP	70 mm	0.033 kg/pcs.	100 pcs.	162416
GST M10X110 DIN 976 4.8 HCP	110 mm	0.055 kg/pcs.	100 pcs.	162425
GST M10 1M DIN 976 4.8 HCP	1000 mm	0.489 kg/m	25 m	114842
GST M10 2M DIN 976 4.8 HCP	2000 mm	0.490 kg/m	50 m	114112
GST M10 3M DIN 976 4.8 HCP	3000 mm	0.490 kg/m	30 m	116569
GST M12X 70 DIN 976 4.8 HCP	70 mm	0.049 kg/pcs.	100 pcs.	162443
GST M12X110 DIN 976 4.8 HCP	110 mm	0.075 kg/pcs.	100 pcs.	162452
GST M12X200 DIN 976 4.8 HCP	200 mm	0.140 kg/pcs.	100 pcs.	162461
GST M12X250 DIN 976 4.8 HCP	250 mm	0.177 kg/pcs.	100 pcs.	180686
GST M12X300 DIN 976 4.8 HCP	300 mm	0.227 kg/pcs.	100 pcs.	180695
GST M12X400 DIN 976 4.8 HCP	400 mm	0.273 kg/pcs.	1 pcs.	180713

Threaded Rod GST DIN 976 4.8 HCP

Type	L	Weight	Quantity	Part number
GST M12X500 DIN 976 4.8 HCP	500 mm	0.345 kg/pcs.	100 pcs.	180722
GST M12 1M DIN 976 4.8 HCP	1000 mm	0.701 kg/m	25 m	114843
GST M12 2M DIN 976 4.8 HCP	2000 mm	0.702 kg/m	20 m	114113
GST M12 3M DIN 976 4.8 HCP	3000 mm	0.702 kg/m	3 m	116570
GST M16 1M DIN 976 4.8 HCP	1000 mm	1.300 kg/m	10 m	114844
GST M16 2M DIN 976 4.8 HCP	2000 mm	1.300 kg/m	20 m	116572
GST M16 3M DIN 976 4.8 HCP	3000 mm	1.300 kg/m	15 m	116571

Certification

Documents

Loads – Threaded Stud GST