



Guiding Set FS HCP

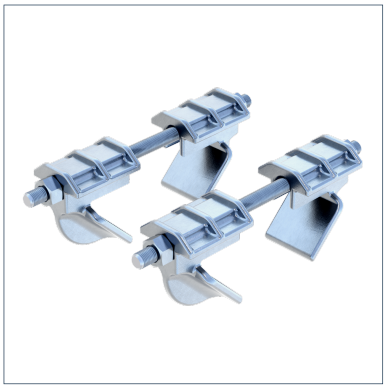

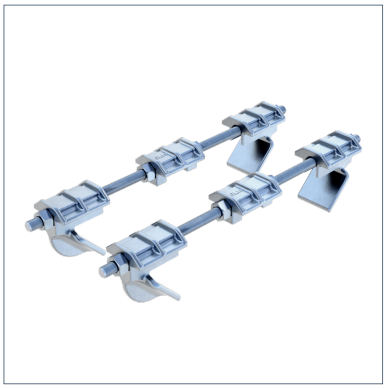

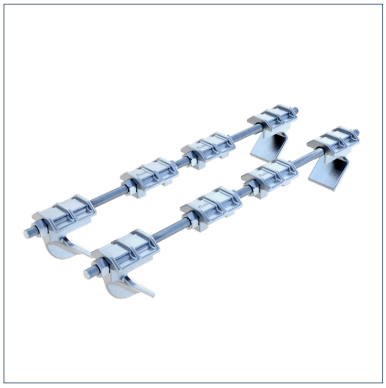

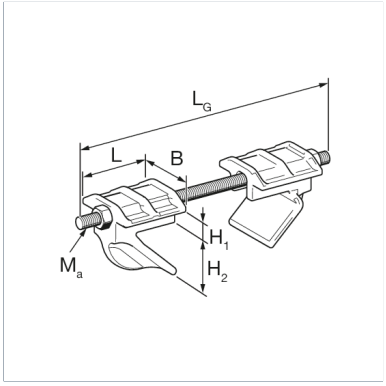

General Information

Element for extending siMotec Pipe Shoes to Guided Pipe Shoes on stell beams with flange widths from 80-300 mm.

Installation

Max. beam flange width t ≤ 30 mm
Tightening Torques:

Flange Thickness [mm]	Beam Width 80 - 220 mm Tightening Torque [Nm]	Beam Width 221 - 300 mm Tightening Torque [Nm]
5 - 10	40	15
11 - 20	25	15
21 - 30	20	15

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel cast steel
Connecting element material	steel
Surface finish	HCP
Corrosion protection class	C4

Additional information

Also available with DualShield for high corrosion protection within C5H environments.


Types

Type	Min. flange width	Max. flange width	Weight	Quantity	Part number
FS 80/120 HCP	80.00 mm	120.00 mm	2 kg/pcs.	1 pcs.	110350
FS 140/160 HCP	121.00 mm	160.00 mm	2.11 kg/pcs.	1 pcs.	110351
FS 180/220 HCP	161.00 mm	220.00 mm	2.3 kg/pcs.	1 pcs.	110352
FS 240/260 HCP	221.00 mm	260.00 mm	2.8 kg/pcs.	1 pcs.	110353
FS 280/300 HCP	261.00 mm	300.00 mm	3.26 kg/pcs.	1 pcs.	112887

Dimensions

Type	B	H1	H2	L	LG	Ma
FS 80/120 HCP	46.5 mm	15.3 mm	42 mm	60 mm	220 mm	M12

Guiding Set FS HCP

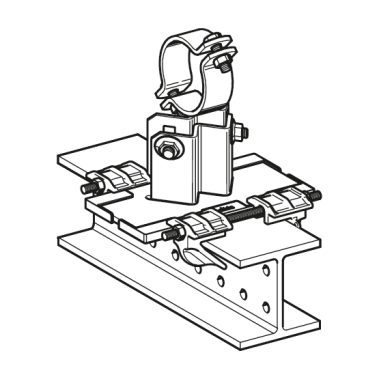

Type	B	H1	H2	L	LG	Ma
FS 140/160 HCP	46.5 mm	15.3 mm	42 mm	60 mm	265 mm	M12
FS 180/220 HCP	46.5 mm	15.3 mm	42 mm	60 mm	325 mm	M12
FS 240/260 HCP	46.5 mm	15.3 mm	42 mm	60 mm	370 mm	M12
FS 280/300 HCP	46.5 mm	15.3 mm	42 mm	60 mm	410 mm	M12

Certification

TÜVRheinland ZERTIFIZIERT