


Slide Set GS 1G

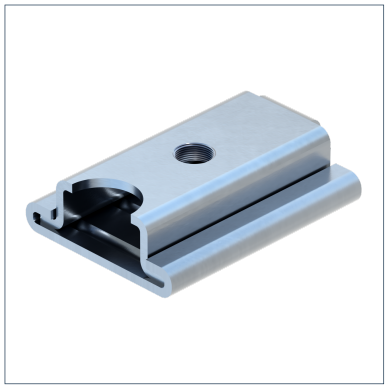

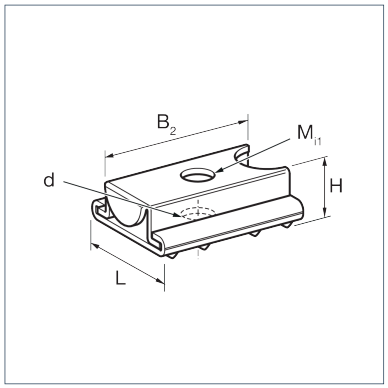

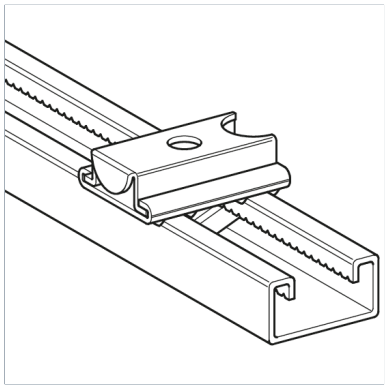

General Information

Slide Set for mounting of small pipe lines with possible elongation of length. Space-saving and thus also to be used for smaller centre distances, especially in combination with pipe clamps Ratio S and LS. The stop at the skid avoids the pipe line from sliding and at the same time is a comfortable guide for rising pipes. Guiding corrugations guarantee the exact 90° arrangement and avoid the screwing up of the slide set.

Installation

Connection to Channel System 41, ideally use flange screw SCR FLA M10 x 20 A4. Fixation with hexagon bolt M8 or M10 is also possible.
Lever arm L(max): 75 mm
Maximum sliding distance:: 45 mm

Mechanical Properties

Static friction µ0	0,15

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	electro galvanized (Fe//Zn)
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}	V{Z,perm.}
GS 1G	0.60 kN	1.20 kN

Moments

Type	M{X,perm.}
GS 1G	0.02 kNm

Types

Type	Max. lever arm	Max. slide path	Thread connection	Weight	Quantity	Part number
GS 1G	75.00 mm	45.00 mm	M10	0.078 kg/pcs.	25 pcs.	198834

Dimensions

Type	B2	d	H	L	Mi1
GS 1G	53 mm	10.5 mm	15.5 mm	40 mm	M10

Certification