

Ducting Angle LUW ST

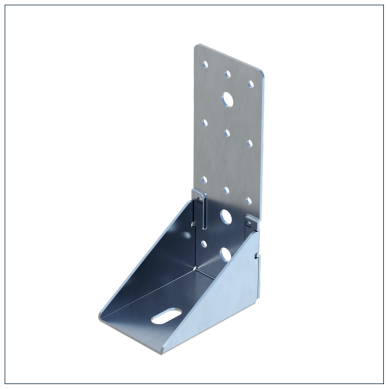

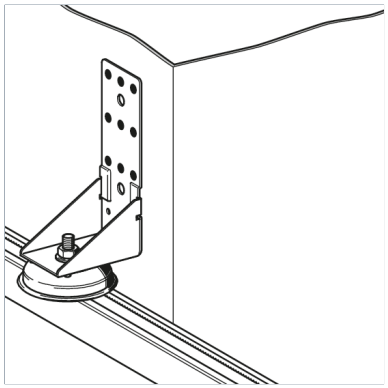

General Information

Mounting element for rectangular, particularly for vertically running ducts. In combination with Sound Absorber SDE 1 suitable for soundproof fixing of ducts according to DIN 4109.

Installation

Fixation to duct with rivets (5 mm) or M10 bolts. The hexagonal screw must be tightened to approx. 5 Nm.

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	pre-galavanised
Corrosion protection class	C2

Forces

Type	-V{Z,perm.}
LUW STABIL 170X90	2.00 kN

Types

Type	Weight	Quantity	Part number
LUW STABIL 170X90	0.324 kg/pcs.	10 pcs.	158534

Dimensions

Type	B	d	d1	H	H1	H2	H3	L
LUW STABIL 170X90	60 mm	10.5 mm	5.2 mm	170 mm	25 mm	54 mm	140 mm	90 mm

Certification