

# Adapter AD IG/IG HCP

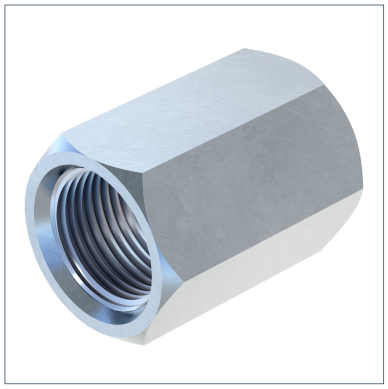

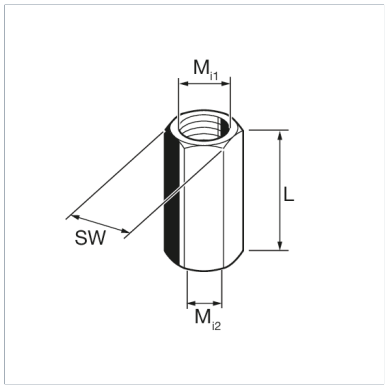


## General Information

HCP Adapter for additional connection options for all Sikla Pipe Clamps equipped with 3G triple thread nut, fixed points and threaded tubes. Adapter has internal threads on both sides.

## Installation

During assembly the Adapter has to be locked with two hexagon nuts (not included in scope of delivery).

A/F of types

| Type | A/F [mm] |
|---|---|
| 1/2"/M10 | 24 |
| 1/2"/M12 | 24 |
| 1/2"/1/2" | 24 |
| 1/2"/M16 | 24 |
| M16/M16 | 19 |

## Material Properties

| | |
|---|---|
| Halogen-free | 0 |
| UV-resistant | 0 |

## Material

| | |
|---|---|
| Primary element material | steel |
| Surface finish | HCP |
| Corrosion protection class | C4 |

## Forces

| Type | -V{Z,perm.} |
|---|---|
| AD IG/IG 1/2''/M10 HCP | 8.50 kN |
| AD IG/IG 1/2''/M12 HCP | 12.50 kN |
| AD IG/IG 1/2''/M16 HCP | 23.50 kN |
| AD IG/IG 1/2''/1/2'' HCP | 23.50 kN |

## Types

| Type | L | Configuration | Weight | Quantity | Part number |
|---|---|---|---|---|---|
| AD IG/IG 1/2''/M10 HCP | 35 mm | Form A | 0.078 kg/pcs. | 10 pcs. | 112163 |
| AD IG/IG 1/2''/M12 HCP | 35 mm | Form A | 0.075 kg/pcs. | 10 pcs. | 112164 |
| AD IG/IG 1/2''/M16 HCP | 40 mm | Form A | 0.072 kg/pcs. | 25 pcs. | 112167 |

# Adapter AD IG/IG HCP

| Type | L | Configuration | Weight | Quantity | Part number |
|---|---|---|---|---|---|
| AD IG/IG 1/2''/1/2'' HCP | 35 mm | Form A | 0.054 kg/pcs. | 10 pcs. | 112166 |

## Dimensions

| Type | L | Mi1 | Mi2 | SW |
|---|---|---|---|---|
| AD IG/IG 1/2''/M10 HCP | 35 mm | M10 | 1/2" | 24 mm |
| AD IG/IG 1/2''/M12 HCP | 35 mm | M12 | 1/2" | 24 mm |
| AD IG/IG 1/2''/M16 HCP | 40 mm | M16 | 1/2" | 24 mm |
| AD IG/IG 1/2''/1/2'' HCP | 35 mm | 1/2" | 1/2" | 24 mm |

## Certification