

Adapter AD IG/IG HCP

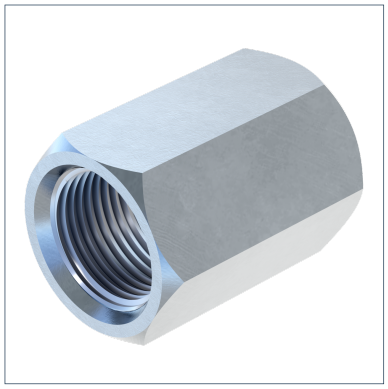

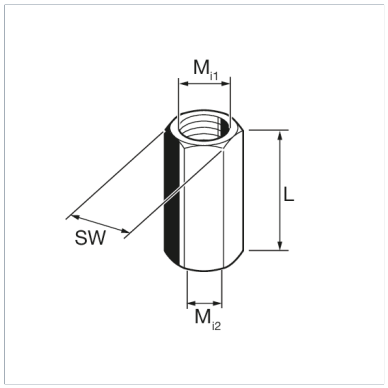

General Information

HCP Adapter for additional connection options for all Sikla Pipe Clamps equipped with 3G triple thread nut, fixed points and threaded tubes. Adapter has internal threads on both sides.

Installation

During assembly the Adapter has to be locked with two hexagon nuts (not included in scope of delivery).

A/F of types

Type	A/F [mm]
1/2"/M10	24
1/2"/M12	24
1/2"/1/2"	24
1/2"/M16	24
M16/M16	19

Material Properties

Halogen-free	0
UV-resistant	0

Material

Primary element material	steel
Surface finish	HCP
Corrosion protection class	C4

Forces

Type	-V{Z,perm.}
AD IG/IG 1/2''/M10 HCP	8,50 kN
AD IG/IG 1/2''/M12 HCP	12,50 kN
AD IG/IG 1/2''/M16 HCP	23,50 kN
AD IG/IG 1/2''/1/2'' HCP	23,50 kN

Types

Type	L	Configuration	Weight	Quantity	Part number
AD IG/IG 1/2''/M10 HCP	35 mm	Form A	0,078 kg/pcs.	10 pcs.	112163
AD IG/IG 1/2''/M12 HCP	35 mm	Form A	0,075 kg/pcs.	10 pcs.	112164
AD IG/IG 1/2''/M16 HCP	40 mm	Form A	0,072 kg/pcs.	25 pcs.	112167

Adapter AD IG/IG HCP

Type	L	Configuration	Weight	Quantity	Part number
AD IG/IG 1/2''/1/2'' HCP	35 mm	Form A	0,054 kg/pcs.	10 pcs.	112166

Dimensions

Type	L	Mi1	Mi2	SW
AD IG/IG 1/2''/M10 HCP	35 mm	M10	1/2"	24 mm
AD IG/IG 1/2''/M12 HCP	35 mm	M12	1/2"	24 mm
AD IG/IG 1/2''/M16 HCP	40 mm	M16	1/2"	24 mm
AD IG/IG 1/2''/1/2'' HCP	35 mm	1/2"	1/2"	24 mm

Certification